

RECOMMENDED VALUES OF STANDARD FREQUENCIES FOR APPLICATIONS INCLUDING THE PRACTICAL REALIZATION OF THE METRE AND SECONDARY REPRESENTATIONS OF THE DEFINITION OF THE SECOND

INDIUM 115 ION ($f \approx 1\,267\text{ THz}$)

$^{115}\text{In}^+$, $5s^2\ ^1S_0 - 5s5p\ ^3P_0$ unperturbed optical transition

1. Recommended value [1] of the frequency in the CIPM List of Frequencies

$$f(^{115}\text{In}^+) = 1\,267\,402\,452\,901\,041.3\text{ Hz}$$

equivalent to

$$\lambda(^{115}\text{In}^+) = 236\,540\,853.549\,545\,5\text{ fm},$$

with a relative standard uncertainty of 4.3×10^{-15} .

2. Method to establish the recommended value

A global adjustment of all measurements of frequency ratios published in peer-reviewed publications and available to the CCL-CCTF WGFS was carried out following the methods presented in [2-6].

This adjustment determines the frequency of 14 transitions (see Figure 1) which are either already adopted as secondary representations of the second [6] or considered as candidates for SRS. It took into account 105 measurements, including 33 frequency ratios and 72 absolute frequency measurements (i.e. ratios to the ^{133}Cs frequency). A total of 483 correlations between these input measurements were estimated and considered in the adjustment. More details on the input data and the processing are provided at https://webtai.bipm.org/ftp/pub/tai/publication/wgfs/Adjustment_2021.html. The recommended value is the direct result of the adjustment, rounded as deemed adequate with respect to the recommended uncertainty.

While the results are from a global adjustment, it is of interest to note (see Figure 1) that the $^{115}\text{In}^+$ transition is involved in 4 measurements relative to ^{133}Cs , and in 1 frequency ratio with an optical transition.

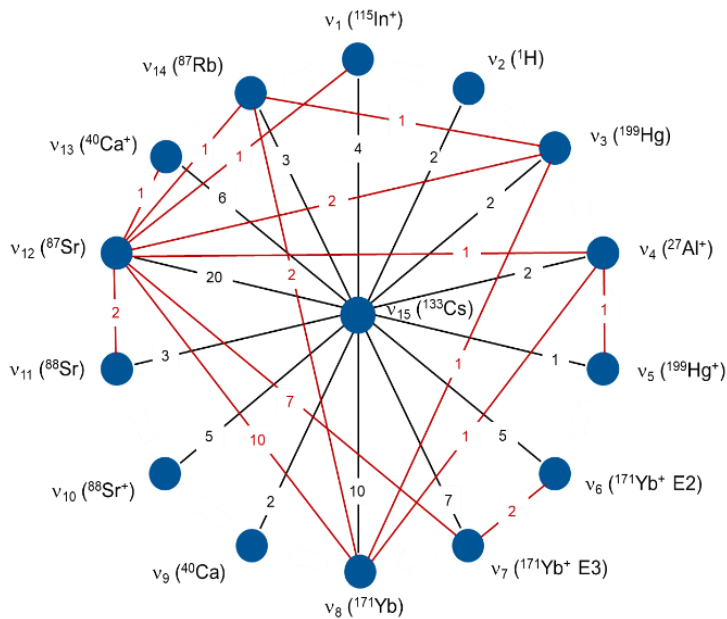


Figure 1: Representation of the 105 measurements linking 14 transitions on the circle and ^{133}Cs at the center.

3. References

- [1] Consultative Committee for Time and Frequency (CCTF), 22nd meeting (session II – online), Recommendation PSFS-2 available at <https://www.bipm.org/en/committees/cc/cctf/22-2-2021>
- [2] H. S. Margolis, P. Gill: Least-squares analysis of clock frequency comparison data to deduce optimized frequency and frequency ratio values; *Metrologia* **52**, 628 (2015)
- [3] L. Robertsson: On the evaluation of ultra-high-precision frequency ratio measurements: examining closed loops in a graph theory framework; *Metrologia* **53**, 1272 (2016)
- [4] G. Panfilo, communication to the CCL-CCTF WGFS. A new implementation of [4] was realized in MatLab at the BIPM (2020)
- [5] Ch. Oates, communication to the CCL-CCTF WGFS. An independent program was developed in Mathematica at NIST (2017)
- [6] F. Riehle, P. Gill, F. Arias, L. Robertsson: The CIPM List of Recommended Frequency Standard Values: Guidelines and Procedures; *Metrologia* **55**, 188-200 (2018)